


How to order DR3W,DR4W,DR5W TYPE(共模型工字電感器)

Inductor	L DR3W0810	A	100A	220B	330C	470D	101E
	TYPE	COMMON	Inductance (μ H)		CURRENT (mA)		
	DR3W 4.5X5.5=4555	A=2com	1R0=1 2R2=2.2 100=10 220=22 101=100		A=50 L=600 B=100 M=700 C=150 N=800 D=200 P=900 E=250 Q=1000 F=300 R=1200 G=350 S=1500 H=400 T=2000 I=450 U=2500 J=500 V=3000 K=550		
	DR3W 5.0X7.0=0507	B=3com					
	DR3W 6.0X8.3=0683	C=4com					
	DR3W 8.0X10 =0810	D=5com					
	DR3W 14 X15 =1415						
	DR3W 16 X18 =1618						
	DR4W 4.5X5.0=4505						
	DR4W 6.0X8.3=0683						
	DR4W 8.0X10 =0810						
	DR4W 9.0X12 =0912						
	DR4W 10 X16 =1016						
	DR4W 14 X15 =1415						
	DR4W 16 X20 =1620						
	DR5W 9.0X12 =0912						
	DR5W 14 X15 =1415						

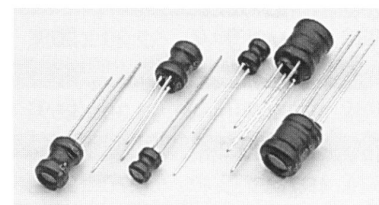

- If the COMMON is A, there are 2 groups following, such as A 100A 220B.
- If the COMMON is B, there are 3 groups following, such as B 100A 220B 330C.
- If the COMMON is C, there are 4 groups following, such as C 100A 220B 330C 470D.
- If the COMMON is D, there are 5 groups following, such as D 100A 220B 330C 470D 101E.
- The series are designed according to the requirements of customers.

Shapes

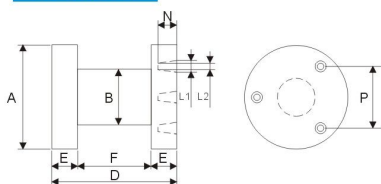


Fig 1 DR3W




Fig 2 DR3W

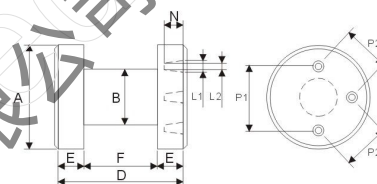


Fig 3 DR3W

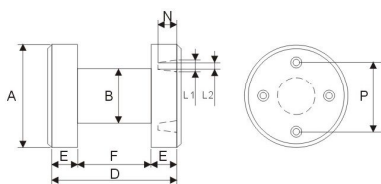


Fig 4 DR4W

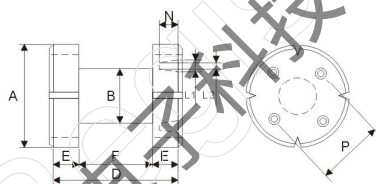


Fig 5 DR4W

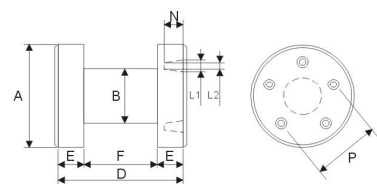


Fig 6 DR5W

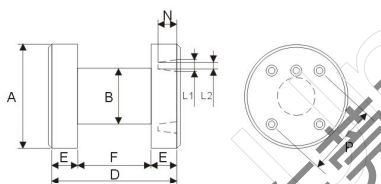


Fig 7 DR5W

CORES.	FIG	DIMENSIONS(mm)					
		A	B	D	E	F	P
DR3W 4.5X5.5	2	4.50 ±0.20	2.00 ±0.10	5.50 ±0.20	1.60 ±0.10	2.30 ±0.15	2
DR3W 5X7	1	5.00 ±0.20	2.00 ±0.10	7.00 ±0.20	2.00 ±0.10	3.00 ±0.15	2.15
DR3W 6X8.3	2	6.00 ±0.20	2.50 ±0.10	8.30 ±0.20	2.15 ±0.15	4.00 ±0.20	2.25
DR3W 8X10	2	8.00 ±0.20	3.50 ±0.15	10.00 ±0.30	2.25 ±0.15	5.50 ±0.20	4
DR3W 14X15	3	14.00 ±0.30	7.00 ±0.20	15.00 ±0.30	3.00 ±0.15	9.00 ±0.20	P1=10/P2=7.5
DR3W 16X18	3	16.00 ±0.30	10.00 ±0.20	18.00 ±0.30	2.50 ±0.15	13.00 ±0.20	P1=10/P2=5
DR4W 4.5X5	5	4.50 ±0.20	2.10 ±0.10	5.00 ±0.20	1.40 ±0.10	2.20 ±0.10	3
DR4W 6X8.3	5	6.00 ±0.20	2.80 ±0.15	8.30 ±0.20	2.15 ±0.15	4.00 ±0.15	3
DR4W 8X10	5	8.00 ±0.20	3.50 ±0.15	10.00 ±0.30	2.25 ±0.15	5.50 ±0.15	4
DR4W 9X12	4	9.00 ±0.20	4.00 ±0.20	12.00 ±0.30	2.00 ±0.15	7.00 ±0.15	5
DR4W 10X16	4	10.00 ±0.30	5.00 ±0.20	16.00 ±0.30	3.00 ±0.15	10.00 ±0.15	7
DR4W 14X15	4	14.00 ±0.30	8.00 ±0.20	15.00 ±0.30	3.00 ±0.15	9.00 ±0.15	10
DR4W 16X20	5	16.00 ±0.30	9.20 ±0.20	20.00 ±0.40	3.50 ±0.15	13.00 ±0.15	9.9
DR5W 9X12	6	9.00 ±0.20	4.00 ±0.20	12.00 ±0.30	2.00 ±0.15	7.00 ±0.15	6
DR5W 14X15	7	14.00 ±0.30	8.00 ±0.20	15.00 ±0.30	3.00 ±0.15	9.00 ±0.15	10.5